

SENCO



2011 **Pneumatic Screwdrivers and Drills**

SEN600C



Features:

- High power
- Perfect balance
- Low noise
- Comfort grip
- Reduces vibration
- Left and right turning

Specifications:

Free speed (rpm)	1800
Bit holder	1/4 "
Torque (Nm) .	5,7
Air Inlet (NPT)	1/4 "
Rec. Hose size ID (mm)	10
Average air consumption (ltr/min)	424
Clutch type	Without
Drive type	Direct
Forward/Reverse	Both
Weight (kg)	0,93
Dimensions (length in mm)	187
Recommended Air pressure (bar)	6,2
Noise level (dBA), max	83

Application:

Driving screws in wood or metal

SEN602C



Features:

- High power
- Perfect balance
- Low noise
- Comfort grip
- Reduces vibration
- Left and right turning

Specifications:

Free speed (rpm)	800
Bit holder	1/4 "
Torque (Nm) .	14,7
Air Inlet (NPT)	1/4 "
Rec. Hose size ID (mm)	10
Average air consumption (ltr/min)	424
Clutch type	Without
Drive type	Direct
Forward/Reverse	Both
Weight (kg)	1,1
Dimensions (length in mm)	205
Recommended Air pressure (bar)	6,2
Noise level (dBA), max	83

Application:

Driving screws in wood or metal

SEN610C



Features:

- High power
- Perfect balance
- Low noise
- Comfort grip
- Reduces vibration
- Optimal torque control
- Extended lifetime
- High-end resistance

Specifications:

Free speed (rpm)	1800
Bit holder	1/4 "
Torque (Nm) .	1.0-10.0
Air Inlet (NPT)	1/4 "
Rec. Hose size ID (mm)	10
Average air consumption (ltr/min)	424
Clutch type	Adjustable
Drive type	Push-in
Forward/Reverse	Both
Weight (kg)	1,1
Dimensions (length in mm)	210
Recommended Air pressure (bar)	6,2
Noise level (dBA), max	83

Application:

Driving screws in wood or metal

SEN611C



Features:

- High power
- Perfect balance
- Low noise
- Comfort grip
- Reduces vibration
- Optimal torque control
- Extended lifetime
- High-end resistance

Specifications:

Free speed (rpm)	800
Bit holder	1/4 "
Torque (Nm) .	3.0-13.0
Air Inlet (NPT)	1/4 "
Rec. Hose size ID (mm)	10
Average air consumption (ltr/min)	453
Clutch type	Adjustable
Drive type	Push-in
Forward/Reverse	Both
Weight (kg)	1,2
Dimensions (length in mm)	230
Recommended Air pressure (bar)	6,2
Noise level (dBA), max	83

Application:

Driving screws in wood or metal

SEN612C



Features:


- High power
- Perfect balance
- Low noise
- Comfort grip
- Reduces vibration

Specifications:

Free speed (rpm)	800
Bit holder	1/4 "
Torque (Nm) .	10
Air Inlet (NPT)	1/4 "
Rec. Hose size ID (mm)	10
Average air consumption (ltr/min)	453
Clutch type	Direct
Drive type	Push-in
Forward/Reverse	Both
Weight (kg)	1,1
Dimensions (length in mm)	202
Recommended Air pressure (bar)	6,2
Noise level (dBA), max	83

Application:

Driving screws in wood or metal

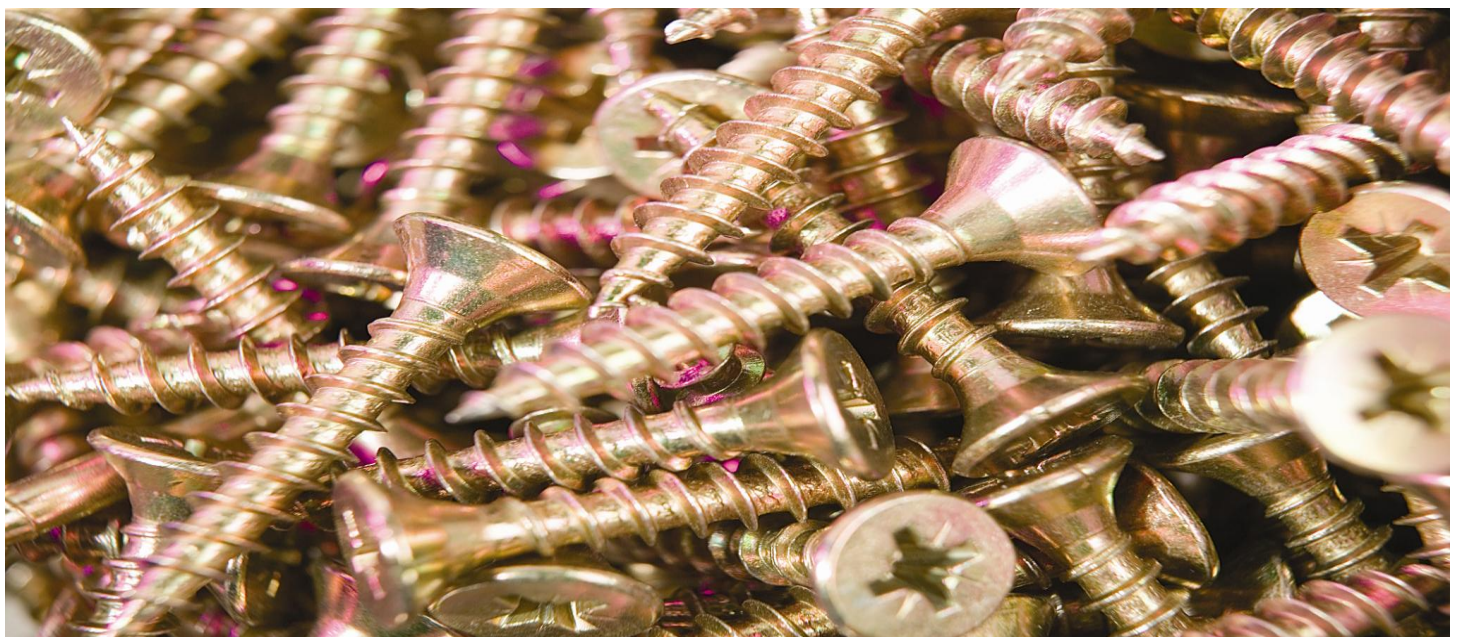

SEN510C



Features:

- High power
- Perfect balance
- Low noise
- Comfort grip
- Reduces vibration
- Variable speed control
- Left-and right-handed

Specifications:

Free speed (rpm)	800
Drill Chuck	1,5-13 mm
Torque (Nm)	10,8
Air Inlet (NPT)	1/4 "
Rec. Hose size ID (mm)	10
Average air consumption (ltr/min)	226
Forward/Reverse	Both
Weight (kg)	1,3
Dimensions (length in mm)	215
Recommended Air pressure (bar)	6,2
Noise level (dBA), max	83
Free speed (rpm)	800
Drill Chuck	1,5-13 mm

Application:

Drilling in wood and metal

SEN511C



Features:

- High power
- Perfect balance
- Low noise
- Comfort grip
- Reduces vibration
- Variable speed control
- Left-and right-handed

Specifications:

Free speed (rpm)	1800
Drill Chuck	1,0-10 mm
Torque (Nm)	5,1
Air Inlet (NPT)	1/4 "
Rec. Hose size ID (mm)	10
Average air consumption (ltr/min)	212
Forward/Reverse	Both
Weight (kg)	1,1
Dimensions (length in mm)	188
Recommended Air pressure (bar)	6,2
Noise level (dBA), max	83
Free speed (rpm)	1800
Drill Chuck	1,0-10 mm

Application:

Drilling in wood and metal





Verpa Senco B.V.

Pascallaan 88

8218 NJ Lelystad, The Netherlands

Tel. +31 (0)320 29 55 75

Fax +31 (0)320 29 55 69

info@verpa-senco.com

www.verpa-senco.com